


PORTFOLIO

ERICK SABANDO

Architectural Designer with a builder's mindset - design, BIM, and construction management.

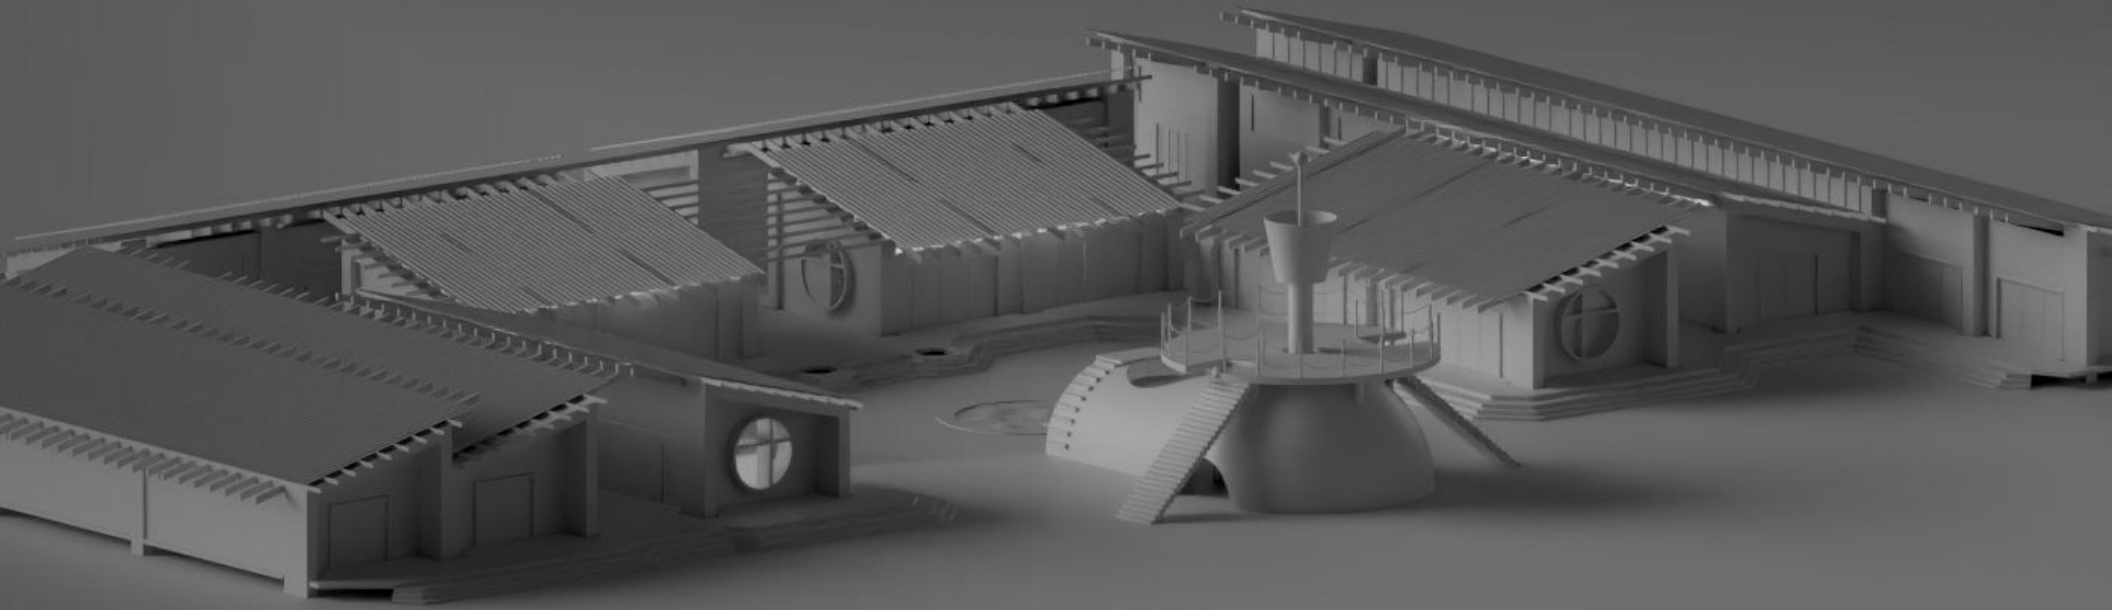

OVERVIEW

CONTENTS & PROFILE

- 01 Profile & Resume
- 02 Moonlight Library - ARC 301
- 03 Camp Gugu / Gugulethu Kindergarten - ARC 302
- 04 Construction Management - CON 383 / CON 495
- 05 BIM Documentation - Revit
- 06 Concept Massing Studies - Rhino
- 07 Drawings & Sketches
- 08 Contact

PROFILE

Mission-driven and design-build focused. My aim is to contribute to a team where creativity and constructibility align - pairing a builder's mindset with a designer's eye.

With hands-on site experience as an excavation laborer, education in Architectural Studies and Construction Management, and proficiency in BIM and visualization tools, I approach every project from concept through constructible detail.

As a United States Marine Corps veteran, I bring discipline, accountability, and a commitment to mission success - work that is structurally sound, visually compelling, and executed with precision.

RESUME

EDUCATION

Arizona State University

B.S. Design / Architectural Studies (in progress)

Minor in Construction Management.

Mesa Community College

AAS, Animation & Time-Based Media

Yavapai College

Aviation / Flight - Helicopters (2014-2015)

KEY SKILLS

- Adobe Illustrator, Photoshop, InDesign, Acrobat
- Rhino - Revit - Blender
- Twinmotion - Unreal Engine 5
- Revit & Rayon documentation
- Microsoft Office
- Bilingual - English / Spanish

EXPERIENCE

U.S. Marine Corps - Veteran

Generator Mechanic / Electrical (2008-2012)

Coordinated setup and repair of field power units and components to USMC standards.

Excavation Laborer - J. Skalley

Site Work (2006-2007)

Executed excavation for foundations and drainage; hands-on constructibility.

Happy Kids Pediatrics

Resource Coordinator (2022-2024)

Scheduling, insurance verification, referrals; HIPAA-compliant patient care.

EXPERIENCE (CONT.)

OnTrac

Delivery Driver (2019-2022)

Route planning, commercial delivery logistics, and accountability.

Independent

Freelance Visualization (2025-present)

Renovation visualization for real clients - sketch to photoreal render.

REFERENCES

Available upon request.

02 / ARC 301 STUDIO

MOONLIGHT LIBRARY


A lakeside library on Tempe Town Lake blending riparian ecology with the wonder of childhood imagination - drawn from Where the Sidewalk Ends and Harry Potter.

TEMPE TOWN LAKE / PUBLIC LIBRARY



ARC 301 STUDIO

FLOOR PLANS

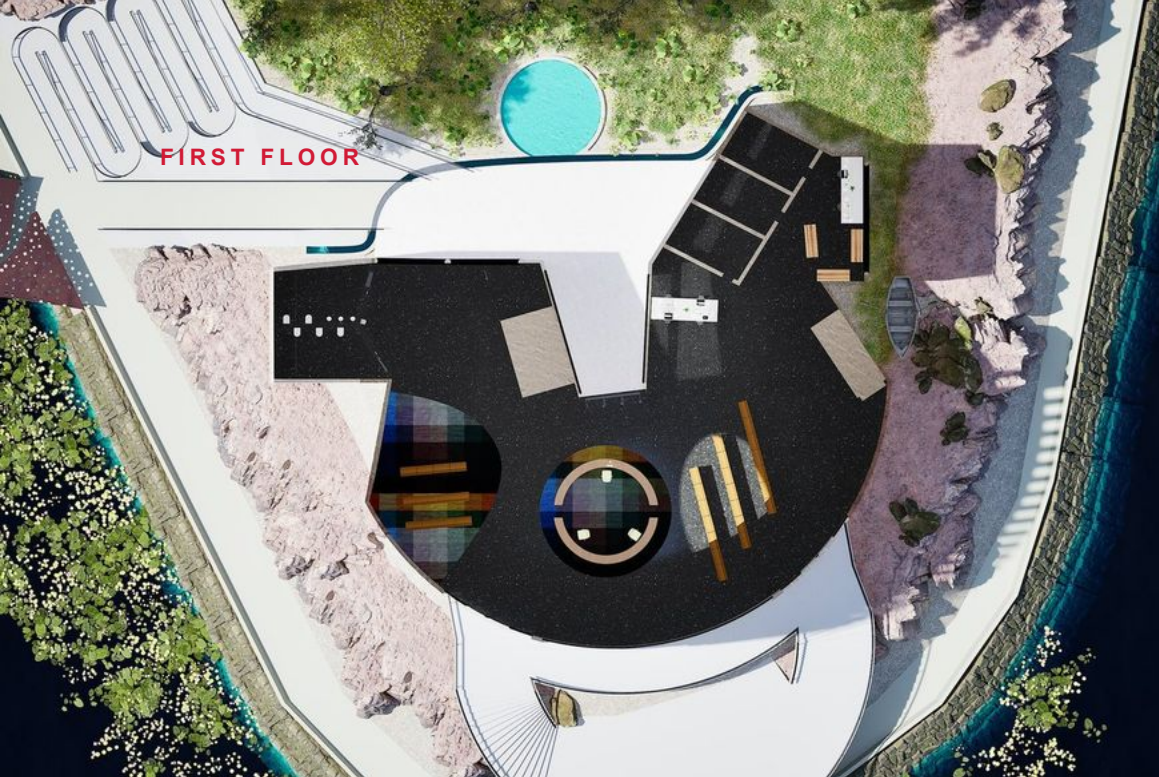

SECTION & EXPERIENCE



NORTH SECTION



EAST SECTION





LAKE ELEVATION - DUSK



EVENING APPROACH

CAMP GUGU

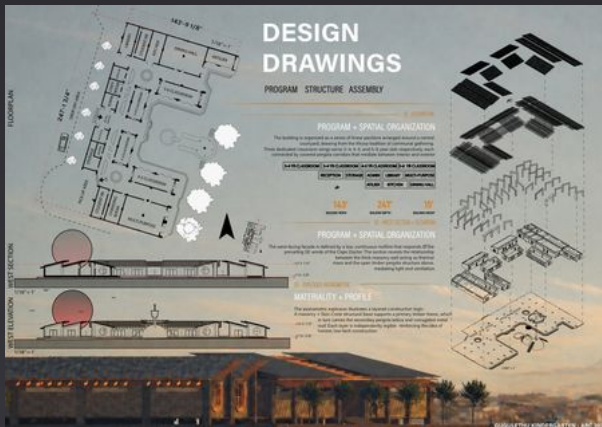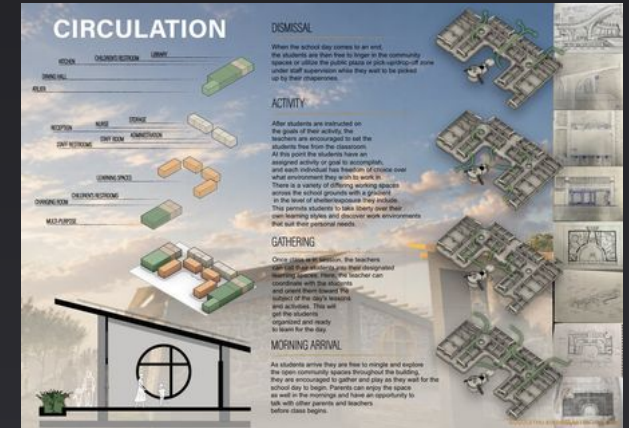

CONSTRUCTION ESTIMATING

Division 3 — Concrete

Division 3 includes ready-mix slab and footing concrete, formwork, slab-on-grade reinforcement, footing rebar, and miscellaneous embeds. A 10% allowance for L-shaped wall-anchor bolts is carried as a percentage line item.

Cost Code	Item Description	Qty	Unit	Material	Labor	Equip.	Subtotal
33105.250335	Normal Weight Ready-Mix 4500 psi	68	CY	\$7,214.36	—	—	\$7,214.36
33105.702950	Place Concrete Foundation Mat (Pumped)	68	CY	—	\$411.76	\$131.36	\$543.12
33543.100510	100-Grit Concrete Floor Polish	0.06	MSF	\$1.83	\$26.33	\$7.36	\$35.79
31113.655050	Forms in Place — Slab, 2"x4"	386	LF	\$258.62	\$575.14	—	\$833.76
33053.403850	Footings 3000 psi spread, over 5 CY	17	CY	\$3,050.52	\$1,085.78	—	\$4,136.30
32110.600600	#4 Uncoated Rebar — Slab on Grade	1.7	TON	\$1,578.82	\$1,162.89	—	\$2,741.71
31123.750050	Stair Forms, 2-use	4	SF	\$10.60	\$48.40	—	\$59.00
32110.600500	#5 Rebar in Footing	0.108	TON	\$100.59	\$81.12	—	\$181.71
—	Misc. L-Shaped Bolts as Wall Anchors (10%)	—	%	\$1,574.58	—	—	\$1,574.58
DIVISION 3 TOTALS				\$13,789.92	\$3,391.42	\$138.72	\$17,320.06

Table 3.1 — Division 3 Concrete Detailed Estimate



SUNNYSLOPE HS - RENDER

The Sunnyslope High School Classroom Addition is a single-story educational facility totaling approximately 5,071 square feet, located on the existing Sunnyslope High School campus in Phoenix, Arizona, within the Glendale Union High School District. The scope of work covers all foundational, structural, architectural, and MEP systems necessary to deliver a fully code-compliant educational environment that integrates with the existing campus.

\$793,749	5,071 SF	\$157	\$1.08 M
Total Direct Cost	Building Area	Cost / SF (Direct)	Final Bid Price

Estimate Highlights

This estimate provides a comprehensive breakdown of material, labor, and equipment costs organized by CSI MasterFormat division. Every line item carries a cost code, description, unit of measure, takeoff quantity, and unit rate, supported by digital and hand takeoffs reconciled against one another. RSMeans 2022 was used as the primary cost database, with regional adjustments applied for the Phoenix area.

EXECUTIVE SUMMARY

BID BUILD-UP TO FINAL PRICE		
Direct construction cost is built up to a final bid price through the project bonds, insurance, overhead, taxes, permits, and profit. The table below details every markup applied between the direct cost and the bid number quoted to the owner.		
Cost Component	Calculation	Amount
Direct Construction Cost (All Divisions)	Sum of Div. 1-16	\$793,749.02
General Conditions (already in Div. 1)	Embedded	Included
Performance & Payment Bonds	0.6% of direct	\$3,193.92
Labor Insurance Burden	13.0% of direct	\$69,201.60
Overhead	17.0% of direct	\$90,494.40
Sales Tax (Phoenix, AZ)	8.0% applicable	\$42,586.00
Permits	0.5% of direct	\$2,661.60
Profit Markup	10.0% of subtotal	\$79,374.90
Contingency	Included in OH	—
FINAL BID PRICE		\$1,081,261.44


Table BID.1 — Markup Build-Up to Final Bid Price

DETAILED ESTIMATE - DIVISION LINE ITEMS


BID BUILD-UP TO FINAL PRICE

PROJECT PLANNING

South Central LRT Extension, Detailed Schedule (page 2023). Source: Kiewit. Full project, activity-level CPM bar chart showing durations, logic, and milestones.

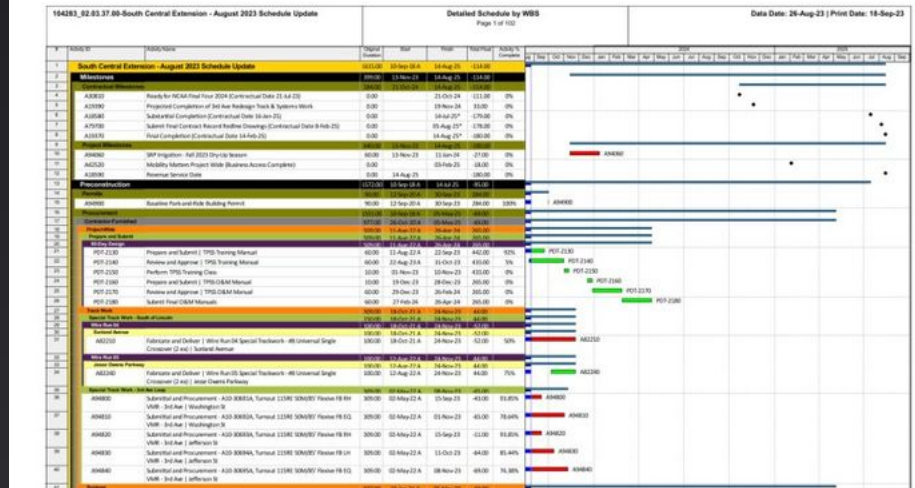

Constructors (Police / Flatiron / FNF, an ACS Group joint venture). All-activities view from 2021 to 2026 with milestones, deliverables, and phased lane openings.

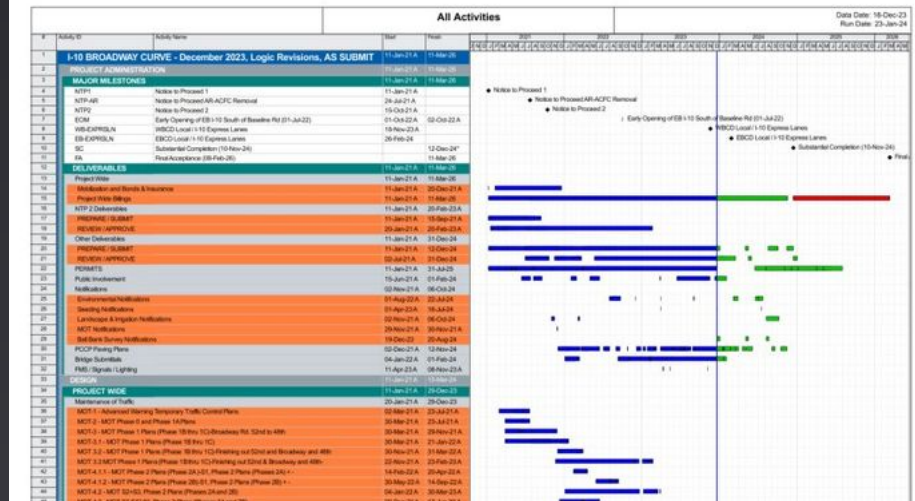

CON 495 semester planning portfolio - CPM master schedules, Primavera P6, heavy-civil baselines, and short-term takt / look-ahead plans across multiple project types.

Figure 2.1 Master Schedule, Primavera P6 CPM

Women's Tower Vertical Expansion, P6 schedule (2022 to 2024). Source: DPR Construction. Activity-level critical-path schedule organized by floor and zone, with executive-summary milestones and substantial-completion dates.




Mullett Arena takt plan dividing the building into Areas 1 through 12, with each trade flowing through one area at a time (framing, MEP rough-in, fireproofing, fire protection, and finishes). Source: Mortenson Construction.




HILLSIDE DAYCARE




EXTERIOR RENDER

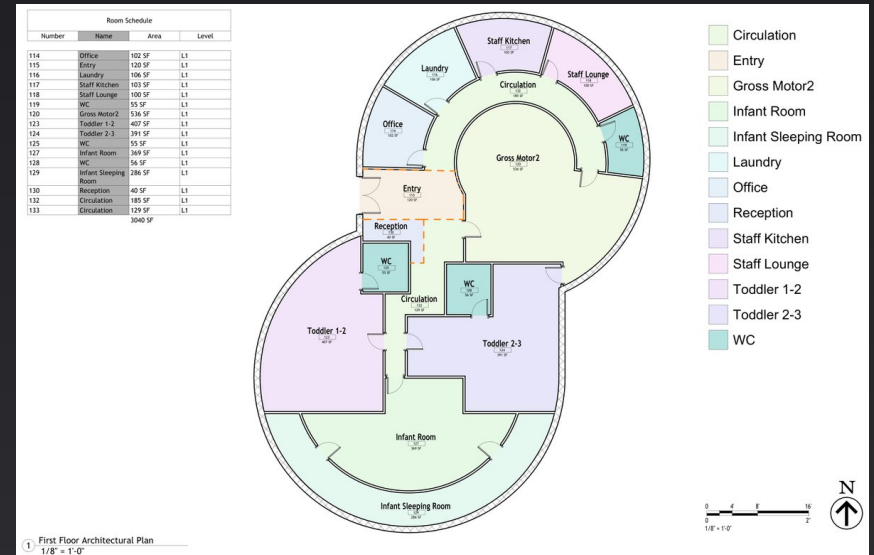

FLOOR PLAN

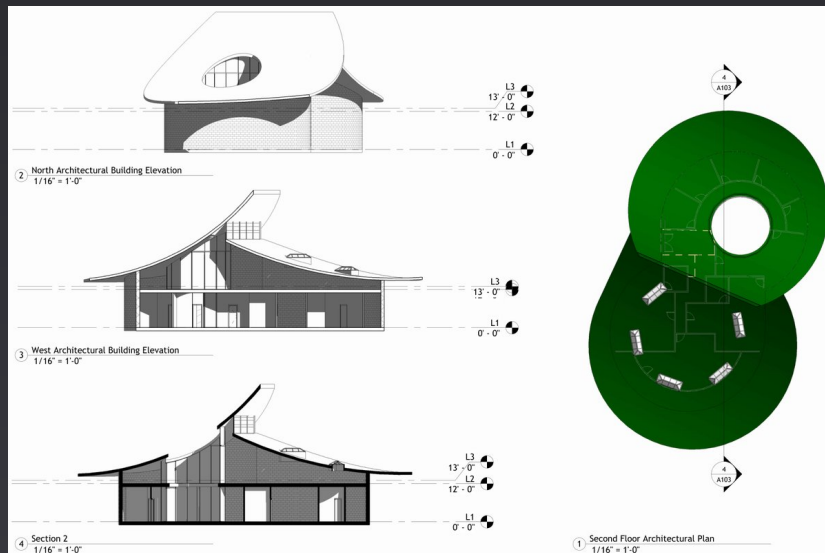


ELEVATIONS & SECTIONS

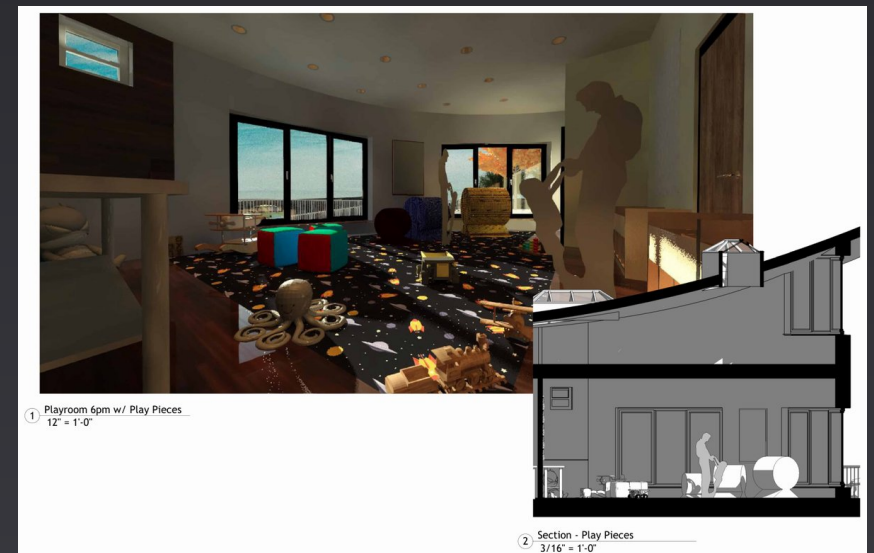


INTERIOR


MAIN STREET PAVILION

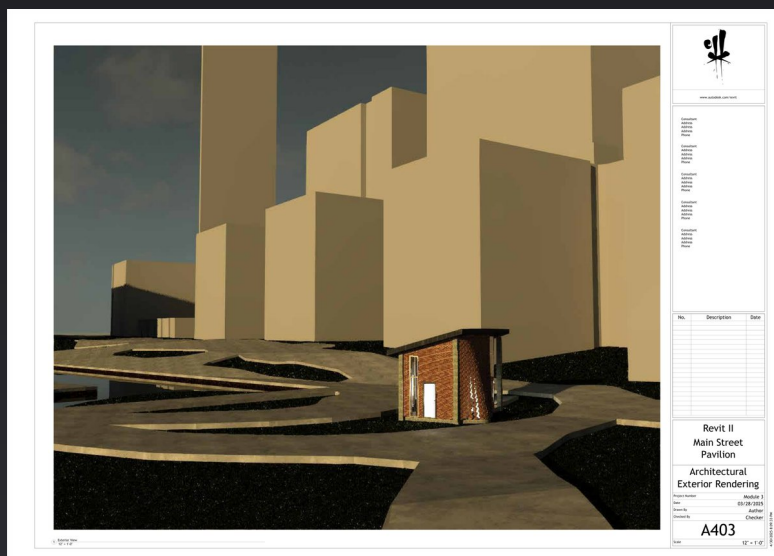

DUSK RENDER

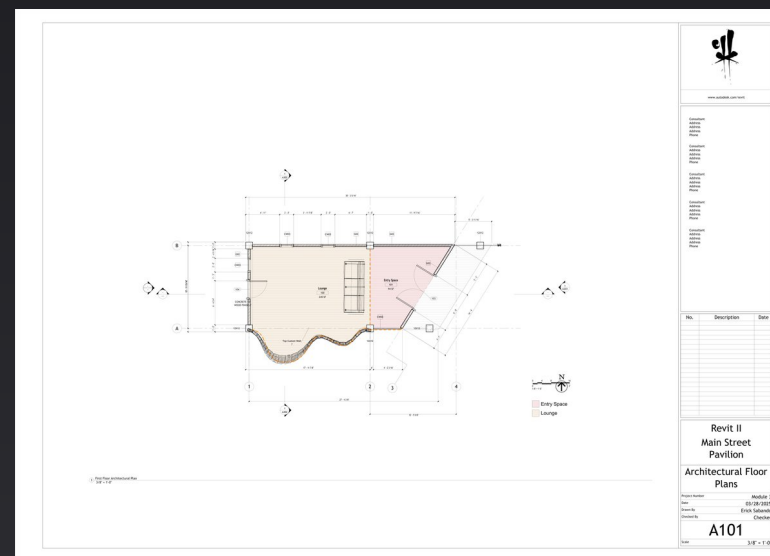

ROOF PLAN





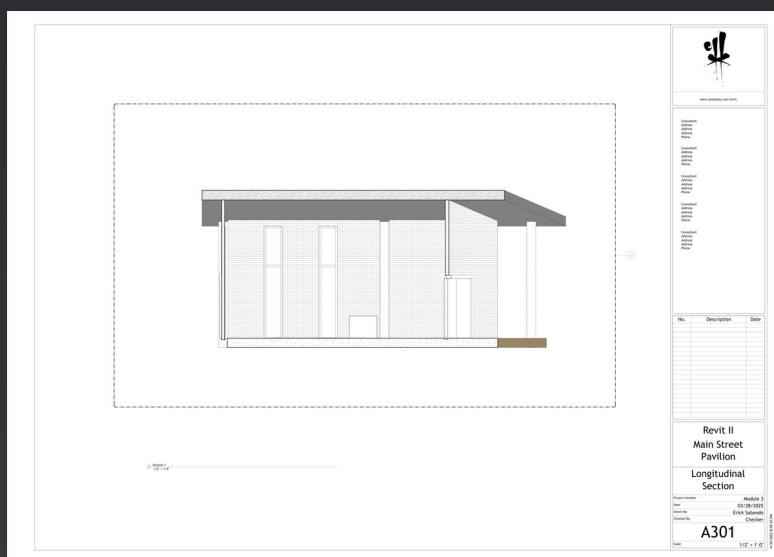


ELEVATION







INTERIOR

CONCEPT MASSING STUDIES

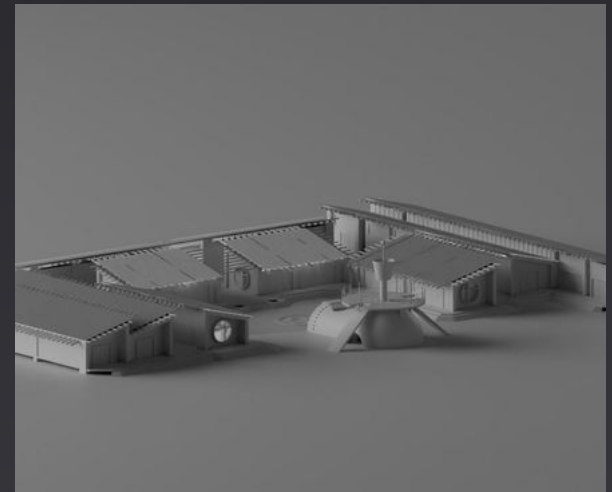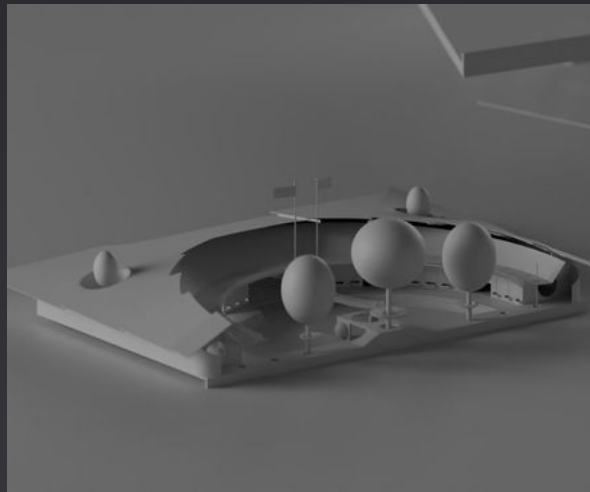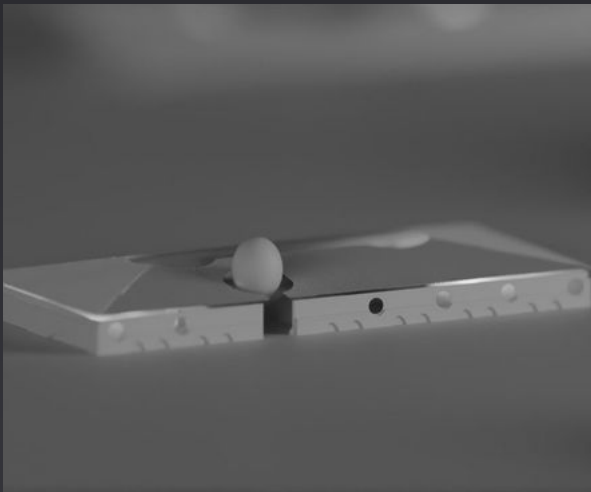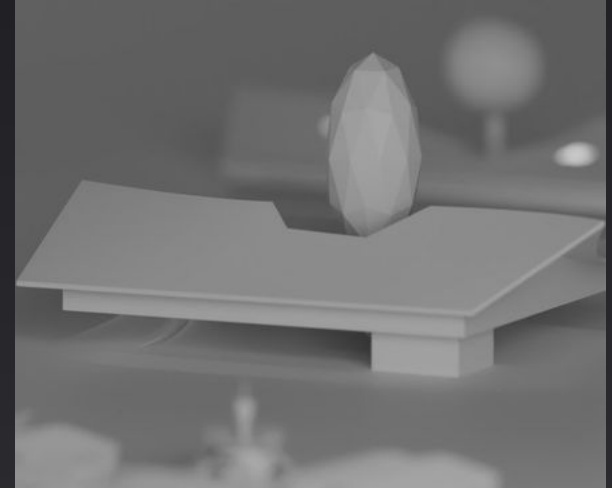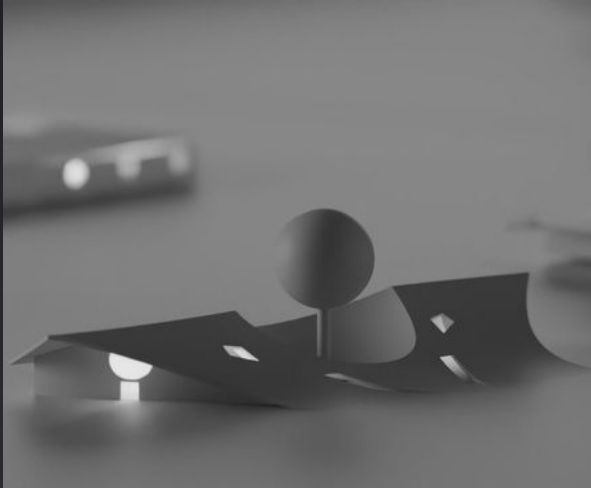

Rapid massing studies modeled in Rhino and rendered as clean clay - exploring form, circulation, and site strategy before committing to a scheme. (Interactive 360 turntables on the web portfolio.)

DRAWINGS & SKETCHES

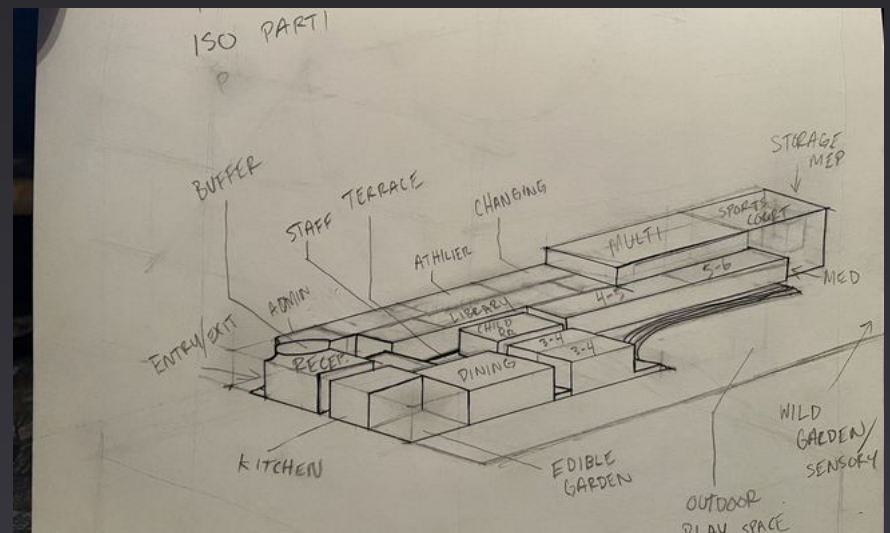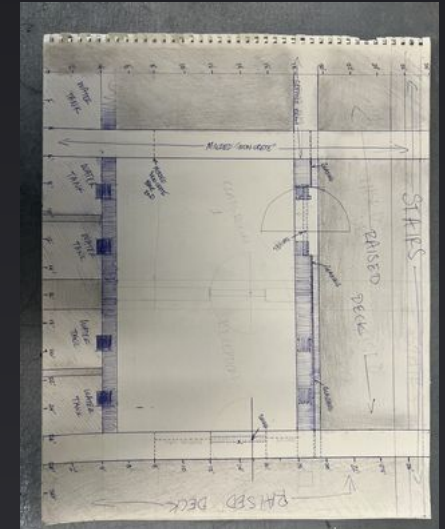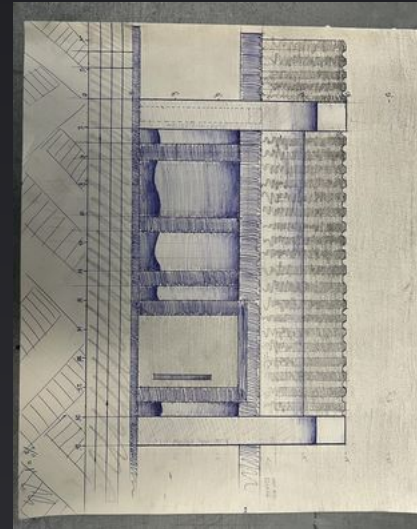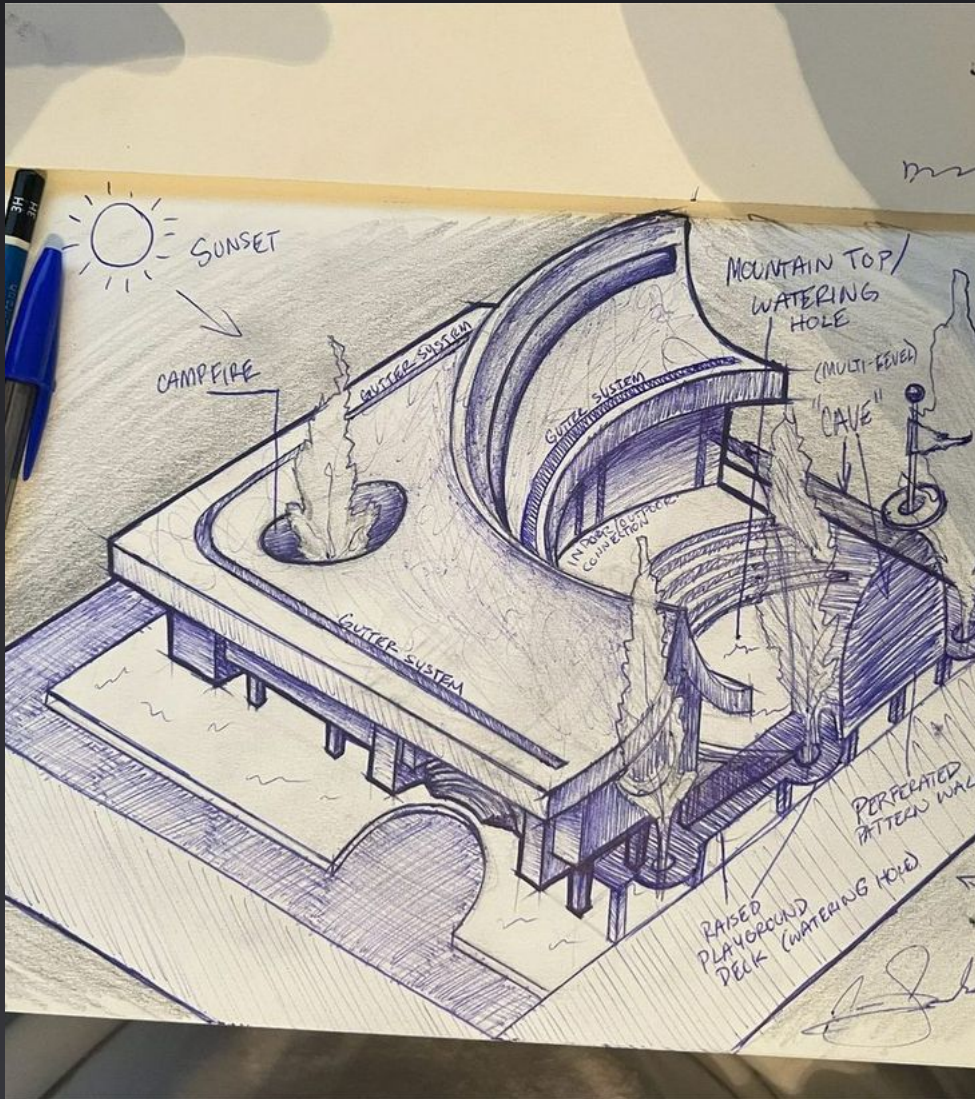

Hand drawings and parti studies - sections, plans, and isometrics worked out in pen and pencil before the model.

LET'S BUILD SOMETHING

EMAIL emsabandocastro@gmail.com

PHONE (732) 703-1511

LINKEDIN [linkedin.com/in/erick-sabando-56768092](https://www.linkedin.com/in/erick-sabando-56768092)

PORTFOLIO ericksabando.com



SCAN FOR THE INTERACTIVE PORTFOLIO